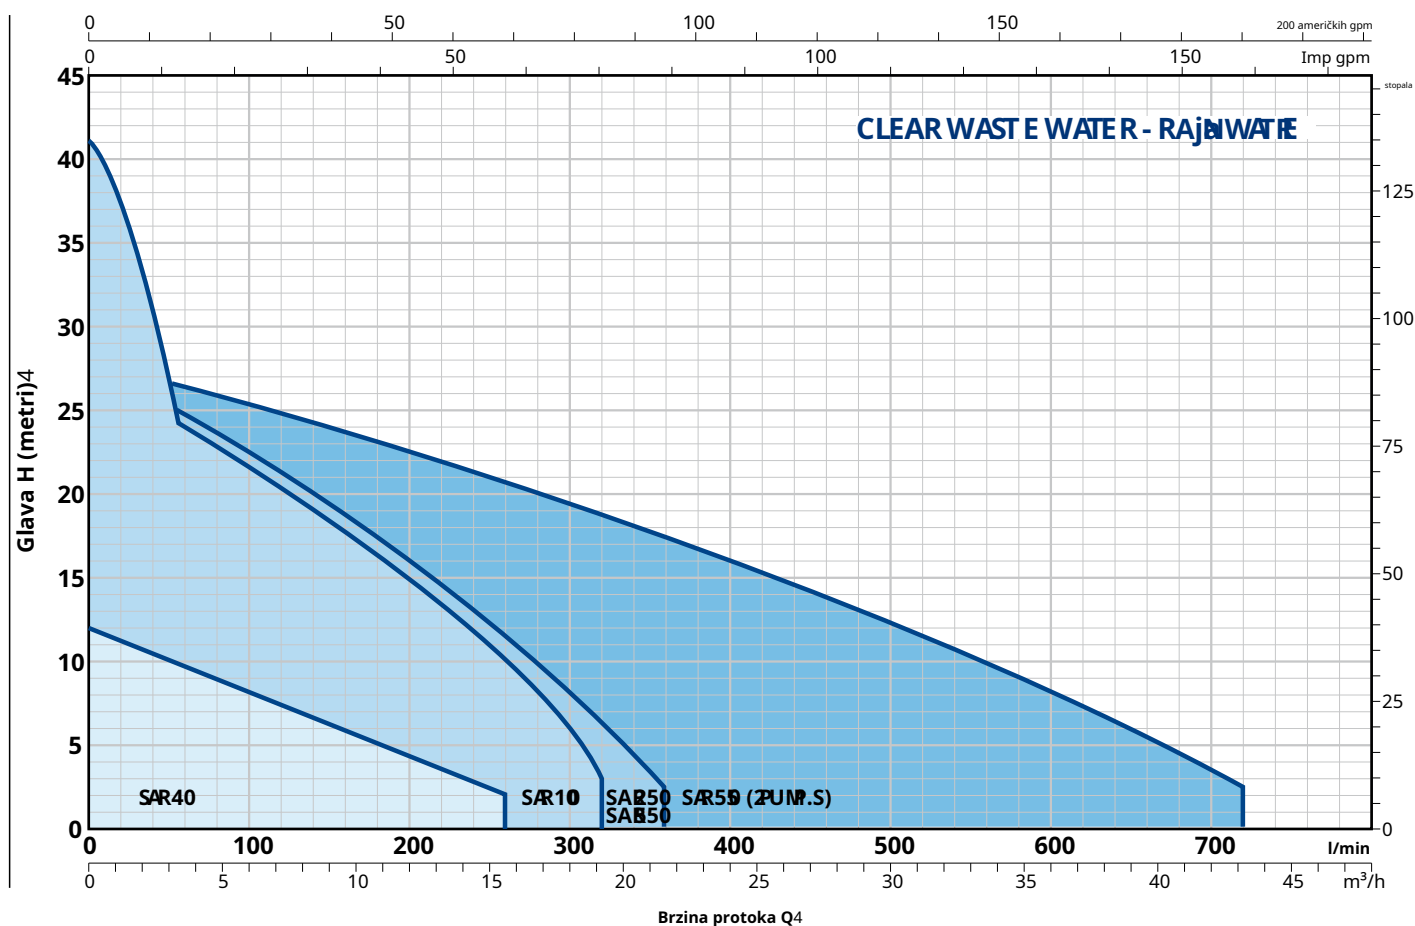


 Kućna uporaba

 Upotreba u poljoprivredi

 Civilna uporaba



RASPON PERFORMANSI

50 Hz $n = 2900 \text{ min}^{-1}$ 



RASPON PERFORMANSI

50 Hz n= 2900 min⁻¹

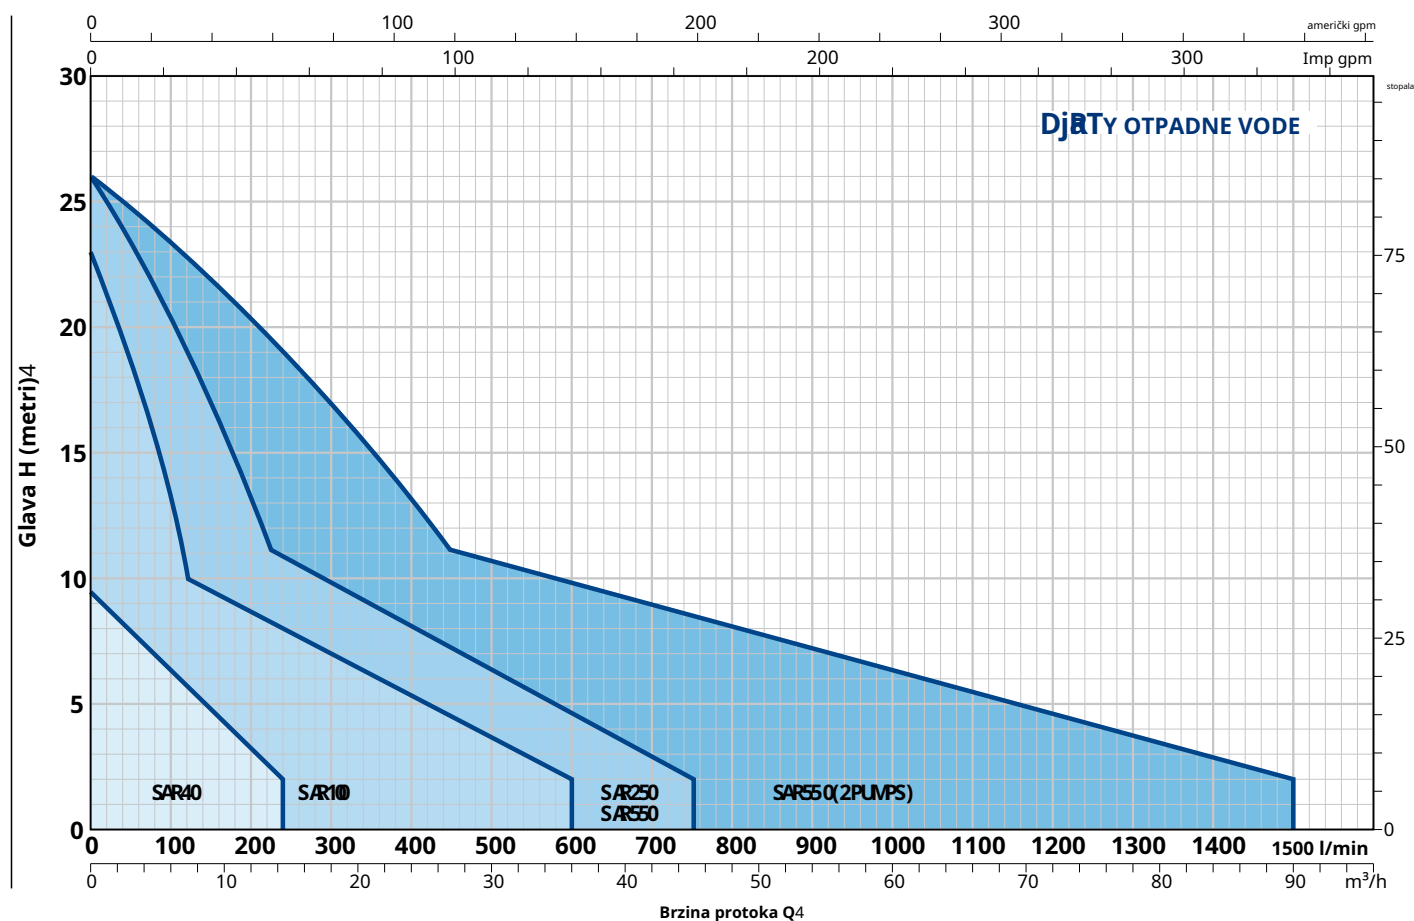

ČISTA OTPADNA VODA - KIŠNICA

MODEL	SNAGA (P2)		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM STUP DIZANJA metara
	kW	KS			
40 SAR - TOP 1	0,25	0,33	40	160	6
40 SAR - TOP 2	0,37	0,50	40	220	8
40 SAR - TOP 3	0,55	0,75	40	260	10
SAR 40 - RXm 1	0,25	0,33	40	160	6.5
SAR 40 - RXm 2	0,37	0,50	40	220	9.5
SAR 40 - RXm 3	0,55	0,75	40	220	11.5



PRLJAVE OTPADNE VODE

MODEL	SNAGA (P2)		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM STUP DIZANJA metara
	kW	KS			
SAR 40 - TOP 2-VORTEX	0,37	0,50	40	180	6.5
SAR 40 - TEX 2	0,37	0,50	40	200	7.5
SAR 40 - TEX 3	0,55	0,75	40	240	9.5
SAR 40 - RXm2/20	0,37	0,50	40	180	6.5

KOMPONENTE

- 40 litara polietilenski spremnik s pokrovnom pločom
- Pumpa kompletna s plovnim prekidačem
- Kabel za napajanje: isporučuje se sa standardnim kabelom od 5 metara sa Schuko utikačem (EN 60335-2-41 standard navodi da kabel za napajanje mora biti dugačak 10 metara za vanjsku upotrebu)
- Nepovratni ventil
- Akumulacijske stanice s ulaznom cijevi 1½" plina, izlazom 1¼" plina i odvodom ½" plina

ČISTA OTPADNA VODA - KIŠNICA



MODEL	SNAGA (P2) kW KS		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM STUP DIZANJA metara
100 SAR - TOP 2	0,37	0,50	100	220	8
100 SAR - TOP 3	0,55	0,75	100	260	10
100 SAR - TOP 4	0,75	1	100	320	12.5
100 SAR - TOP MULTI 1	0,37	0,50	100	70	25
100 SAR - TOP MULTI 2	0,55	0,75	100	80	40
100 SAR - TOP MULTI 3	0,55	0,75	100	120	32
100 SAR - RXm 2	0,37	0,50	100	220	9.5
100 SAR - RXm 3	0,55	0,75	100	220	11.5
100 SAR - 10 Dm	0,75	1	100	300	15.5
100 SAR - 20 Dm	0,75	1	100	250	19
100 SAR - 30 Dm	1.1	1.5	100	275	26

PRLJAVE OTPADNE VODE

MODEL	SNAGA (P2) kW KS		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM GLAVA metara
100 SAR - TOP 2-VORTEX	0,37	0,50	100	180	6.5
100 SAR - TOP 3-VORTEX	0,55	0,75	100	180	8
100 SAR - RXm 2/20	0,37	0,50	100	180	6.5
100 SAR - RXm 3/20	0,55	0,75	100	180	8
100 SAR - ZXm 2/30	0,55	0,75	100	320	12.5
100 SAR - ZXm 2/40	0,55	0,75	100	400	11
SAR 100 - VXm 8/35	0,55	0,75	100	350	8
SAR 100 - VXm 10/35	0,75	1	100	400	10
SAR 100 - VXm 8/50	0,55	0,75	100	450	6
SAR 100 - VXm 10/50	0,75	1	100	550	8.5
SAR 100 - BCm 10/50	0,75	1	100	600	11

SAR 100 S PUMPAMA S NOŽEVIMA (TRITUS)

100 SAR - 0,75 TRm	0,75	1	100	120	15.5
100 SAR - TRm 1.1	1.1	1.5	100	120	22

KOMPONENTE

- 100 litara polietilenski spremnik s pokrovnom pločom
- Pumpa kompletna s plovnim prekidačem
- Kabel za napajanje: isporučuje se sa standardnim kabelom od 10 metara sa Schuko utikačem
- Kontrolna kutija (samo za SAR 100-TR)
- Akumulacijske stanice s ulaznom cijevi Ø 110 mm, izlazom 1¼" ili 1½" ili 2" plinom i ventilacijskim otvorom Ø 50 mm

ČISTA OTPADNA VODA - KIŠNICA

MODEL	SNAGA (P2) kW KS		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM STUP DIZANJA metara
250 SAR - TOP 3	0,55	0,75	250	260	10
250 SAR - TOP 4	0,75	1	250	320	12.5
250 SAR - TOP 5	0,92	1.25	250	360	15
250 SAR - RXm 3	0,55	0,75	250	220	11.5
250 SAR - RXm 4	0,75	1	250	260	15
250 SAR - RXm 5	1.1	1.5	250	300	19.5
250 SAR - 10 Dm	0,75	1	250	300	15.5
250 SAR - 20 Dm	0,75	1	250	250	19
250 SAR - 30 DM	1.1	1.5	250	275	26



PRLJAVE OTPADNE VODE

MODEL	SNAGA (P2) kW KS		KAPACITET litara	MAKSIMUM PROTOK litara/min	MAKSIMUM STUP DIZANJA metara
250 SAR - TOP 2-VORTEX	0,37	0,50	250	180	6.5
250 SAR - TOP 3-VORTEX	0,55	0,75	250	180	8
250 SAR - RXm 3/20	0,55	0,75	250	180	8
250 SAR - RXm 4/40	0,75	1	250	280	9.5
250 SAR - RXm 5/40	1.1	1.5	250	380	12.5
250 SAR - VXm10/35-ST	0,75	1	250	400	10.5
250 SAR - VXm10/50-ST	0,75	1	250	550	9.5
SAR 250 - BCm 10/50-ST	0,75	1	250	600	11
250 SAR - VXm 10/35	0,75	1	250	400	10
250 SAR - VXm 15/35	1.1	1.5	250	500	13.5
250 SAR - VXm 10/50	0,75	1	250	550	8.5
250 SAR - VXm 15/50	1.1	1.5	250	650	11
250 SAR - BCm 10/50	0,75	1	250	600	11
250 SAR - BCm 15/50	1.1	1.5	250	750	14

SAR 250 S PUMPAMA S NOŽEVIMA (TRITUS)

250 SAR - 0,75 TRm	0,75	1	250	120	15.5
250 SAR - TRm 1.1	1.1	1.5	250	120	22
250 SAR - 1,5 TRm	1.5	2	250	260	25

KOMPONENTE

- 250 litara polietilenski spremnik s pokrovnom pločom
- Pumpa kompletna s plovnim prekidačem
- Kabel za napajanje: isporučuje se sa standardnim kabelom od 10 metara sa Schuko utikačem
- Kontrolna kutija (samo za SAR 250-TR)
- Akumulacijske stanice s ulaznom cijevi Ø 110 mm, izlazom plina 1¼" ili 1½" ili 2" i odušnikom DN 50 ili DN 75
- Spojna potpora i vodeće cijevi za spuštanje pumpe (samo za VX-ST i BC-ST)

OPCIJE DOSTUPNE NA UPIT

- **Alarm KIT(KSKIT-ALLARME)**
Kit uključuje: kontrolnu kutiju, sirenu s vlastitim napajanjem, plovak
- **Komplet za produljenje od 300 mm(KSKIT-308MA)**
Komplet uključuje: komplet za proširenje za ugradnju polietilenskog "SAR" spremnika na veće dubine
- "SAR" stanice s kuglastim nepovratnim ventilima i kuglastim ventilom u ispusnoj cijevi

ČISTA OTPADNA VODA - KIŠNICA

MODEL	SNAGA (P2)		KAPACITET litara	MAKSIMUM PROTOK (1 pumpa) litara/min	MAKSIMUM STUP DIZANJA metara
	kW	KS			
550 SAR - TOP 4	0,75	1	550	320	12.5
550 SAR - TOP 5	0,92	1.25	550	360	15
550 SAR - RXm 4	0,75	1	550	260	15
550 SAR - RXm 5	1.1	1.5	550	300	19.5
550 SAR - 10 Dm	0,75	1	550	300	15.5
550 SAR - 20 DM	0,75	1	550	250	19
550 SAR - 30 DM	1.1	1.5	550	275	26



PRLJAVE OTPADNE VODE

MODEL	SNAGA (P2)		KAPACITET litara	MAKSIMUM PROTOK (1 pumpa) litara/min	MAKSIMUM STUP DIZANJA metara
	kW	KS			
550 SAR - RXm 4/40	0,75	1	550	280	9.5
550 SAR - RXm 5/40	1.1	1.5	550	380	12.5
SAR 550 - VXm 10/35-ST	0,75	1	550	400	10.5
SAR 550 - VXm 10/50-ST	0,75	1	550	550	9.5
SAR 550 - BCm10/50-ST	0,75	1	550	600	11
SAR 550 - VXm 10/35	0,75	1	550	400	10
SAR 550 - VXm 15/35	1.1	1.5	550	500	13.5
550 SAR - VXm 10/50	0,75	1	550	550	8.5
550 SAR - VXm 15/50	1.1	1.5	550	650	11
550 SAR - VX 15/50 (*)	1.1	1.5	550	650	11
550 SAR - BCm 10/50	0,75	1	550	600	11
SAR 550 - BCm 15/50	1.1	1.5	550	750	14
550 SAR - BC 15/50 (*)	1.1	1.5	550	750	14

SAR 550 S PUMPAMA S NOŽEVIMA (TRITUS)

550 SAR - 0,75 TRm	0,75	1	550	120	15.5
550 SAR - TRm 1.1	1.1	1.5	550	120	22
550 SAR - 1,1 TR (*)	1.1	1.5	550	120	22
550 SAR - 1,5 TRm	1.5	2	550	260	25

KOMPONENTE

- 550 litara polietilenski spremnik s dva poklopca
- Dvije jednofazne pumpe (*dvije trofazne pumpe)
- Kabel za napajanje: isporučuje se sa standardnim kablom od 10 metara
- Kontrolna kutija
- Tri plovka za: 1) naizmjenično uključivanje jedne od dvije crpke, 2) maksimalnu razinu s uključivanjem druge crpke, 3) minimalnu razinu s isključivanjem crpki
- Akumulacijske stanice s dvije ulazne cijevi Ø 110 mm, izlazom plina 1¼" ili 1½" ili 2" i odušnikom DN 50 ili DN 75
- Spojna potpora i vodeće cijevi za spuštanje pumpe (samo za VX-ST i BC-ST)


OPCIJE DOSTUPNE NA UPIT

- **Alarm KIT** (KSKIT-ALLARME)
Kit uključuje: kontrolnu kutiju, sirenu s vlastitim napajanjem, plovak
- **Komplet za produljenje od 300 mm** (KSKIT-308MA)
Komplet uključuje: komplet za proširenje za ugradnju polietilenskog "SAR" spremnika na veće dubine
PAŽNJA: spremnik je opremljen s dva poklopca
- "SAR" stanice s kuglastim nepovratnim ventilima i kuglastim ventilom u ispusnoj cijevi

DIMENZIJE I TEŽINA


MODEL	PRIKLJUČCI			h	kg
	I	U(1)	S		
40 SAR-TOP 1	1½"	1¼"	½"	305	14.0
40 SAR-TOP 2					14.7
40 SAR-TOP 3				335	16.1
40 SAR-RXm 1				305	14.2
40 SAR-RXm 2					15.3
40 SAR-RXm 3					16.9
40 SAR-TOP 2-VORTEX				335	14.6
40 SAR-TEX 2					15.8
40 SAR-TEX 3					16.5
40 SAR-RXm 2/20					15.6

(1) Priključak s muškim navojem

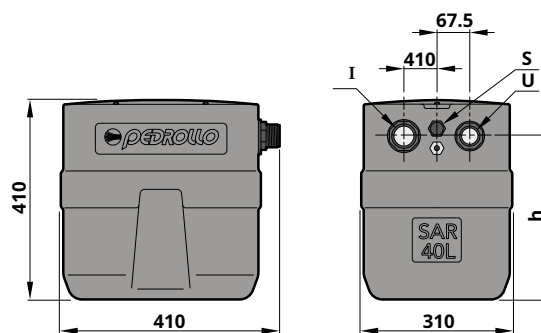


MODEL	PRIKLJUČCI			I1	I2	kg
	I	U(1)	S			
100 SAR-TOP 2	DN 110	1¼"	DN 50	145	100	28.7
100 SAR-TOP 3						30.1
100 SAR-TOP 4						33.7
100 SAR-TOP MULTI 1		1¼"				30.3
100 SAR-TOP MULTI 2						32.9
100 SAR-TOP MULTI 3						32.9
100 SAR-RXm 2						29.3
100 SAR-RXm 3						29.6
100 SAR-Dm 10		1½"				36.6
100 SAR-Dm 20						36.6
100 SAR-Dm 30						38.6
100 SAR-TOP 2-VORTEX		1¼"				28.7
100 SAR-TOP 3-VORTEX						30.1
100 SAR-RXm 2/20						29.6
100 SAR-RXm 3/20						29.8
100 SAR-ZXm 2/30		1½"				29.6
100 SAR-ZXm 2/40						30.4
100 SAR-VXm 8/35						36.4
100 SAR-VXm 10/35						37.2
100 SAR-VXm 8/50		2"				36.9
100 SAR-VXm 10/50						37.7
100 SAR-BCm 10/50		1¼"				38.4
100 SAR-TRm 0,75						46.0
100 SAR-TRm 1.1						47.6

(1) Priključak s muškim navojem

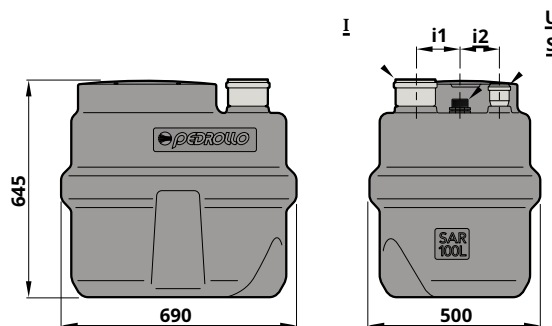


DIMENZIJE I TEŽINA

MODEL	PRIKLJUČCI			kg
	I	U(1)	S	
250 SAR-TOP 3	DN 110	1¼"	DN 50	42.6
250 SAR-TOP 4		1½"		46.2
250 SAR-TOP 5		1½"		46.2
250 SAR-RXm 3		1¼"		47.0
250 SAR-RXm 4		1½"		50.0
250 SAR-RXm 5		1½"		51.0
250 SAR-Dm 10		1½"		51.2
250 SAR-Dm 20		1½"		53.5
250 SAR-Dm 30		1½"		51.2
250 SAR-TOP 2-VORTEX		1¼"		44.0
250 SAR-TOP 3-VORTEX		1¼"		46.0
250 SAR-RXm 3/20		1½"		45.0
250 SAR-RXm 4/40		1½"		53.0
250 SAR-RXm 5/40		1½"		53.0
250 SAR-VXm10/35-ST		2"		60.0
250 SAR-VXm10/50-ST		2"		60.0
250 SAR-BCm10/50-ST		1½"		60.5
250 SAR-VXm 10/35		1½"		53.0
250 SAR-VXm 15/35		1½"		54.0
250 SAR-VXm 10/50		2"		53.0
250 SAR-VXm 15/50		2"		53.0
250 SAR-BCm 10/50		2"		53.5
250 SAR-BCm 15/50		2"	DN 75	55.0
250 SAR-TRm 0,75		1¼"	DN 50	62.0
250 SAR-TRm 1.1		1¼"		64.0
250 SAR-TRm 1.5		1½"	DN 50	79.0

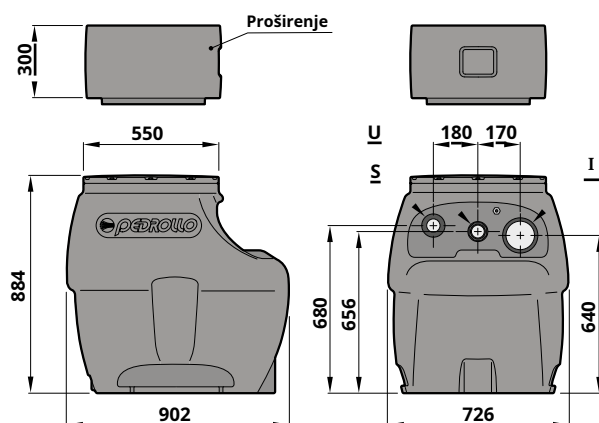


Samo za verzije VX-ST, BC-ST

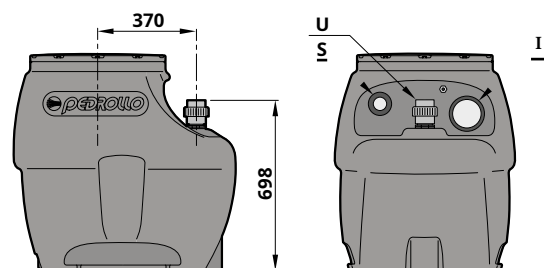


(1) Priključak s muškim navojem (ženski za VX-ST i BC-ST)

MODEL	PRIKLJUČCI			kg
	I	U(1)	S	
550 SAR-TOP 4	DN 110	1½"	DN 50	96.0
550 SAR-TOP 5				95.2
550 SAR-RXm 4				103.0
550 SAR-RXm 5				105.0
550 SAR-Dm 10				101.2
550 SAR-Dm 20				101.2
550 SAR-Dm 30				105.7
550 SAR-RXm 4/40				105.0
550 SAR-RXm 5/40				106.0
550 SAR-VXm 10/35-ST		2"	DN 75	120.0
550 SAR-VXm 10/50-ST				121.0
550 SAR-BCm10/50-ST				122.0
550 SAR-VXm 10/35				105.0
550 SAR-VXm 15/35				106.0
550 SAR-VXm 10/50		2"		105.1
550 SAR-VXm 15/50				108.0
550 SAR-VX 15/50				107.0
550 SAR-BCm 10/50				109.0
550 SAR-BCm 15/50				108.0
550 SAR-prije Krista 15/50				106.0
550 SAR-TRm 0,75		1¼"	DN 50	135.0
550 SAR-TRm 1.1				137.5
550 SAR-TR 1.1				137.0
550 SAR-TRm 1.5		1½"		182.0

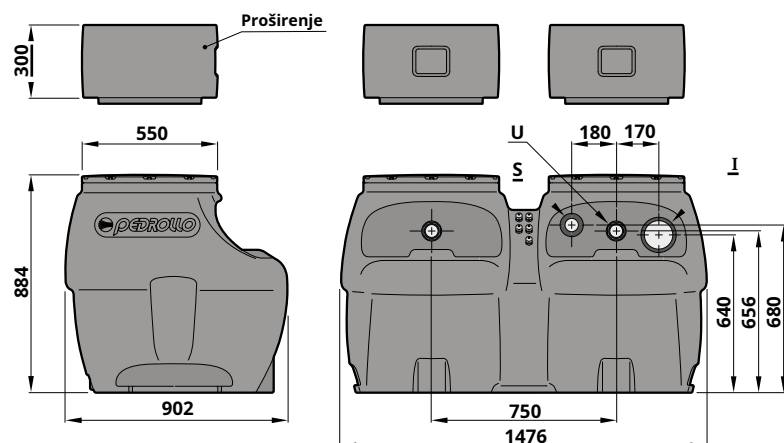

Samo za verzije VX-ST, BC-ST

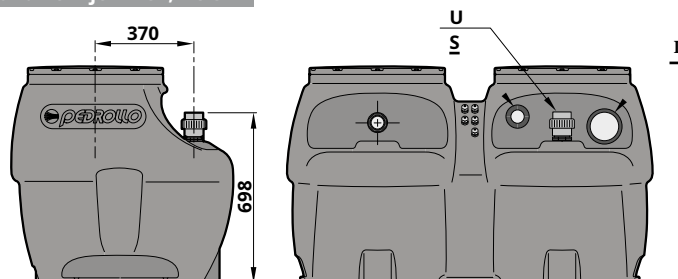

(1) Priključak s muškim navojem (ženski za VX-ST i BC-ST)