




EcoTKP

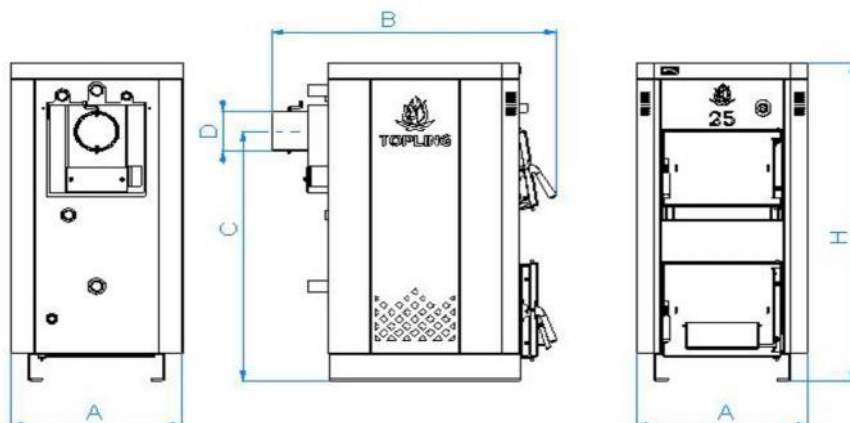

KOTAO	A(mm)	B(mm)	H(mm)	C(mm)	D(mm)
20	575	920	1200	940	150
25	575	950	1200	940	150
30	595	980	1200	940	160
35	645	980	1200	940	160
40	695	980	1200	940	180
50	695	1080	1200	950	180

Tip kotla	EcoTKP 20	EcoTKP 25	EcoTKP 30	EcoTKP 35	EcoTKP 40	EcoTKP 50
Maksimalna snaga (kW)	20	25	30	35	40	50
Raspon snage (kW)	9-20	11-25	15-30	17-35	20-40	25-50
Maksimalni radna temperatura (°C)	90	90	90	90	90	90
Maksimalni radni pritisak (bar)	2.5	2.5	2.5	2.5	2.5	2.5
Zahtjevani potpitisak dimnjaka(Pa)	18	20	22	24	27	28
Polazni/povratni vod (R)	5/4''	5/4''	5/4''	5/4''	5/4''	5/4''
Punjenje/praznjenje(R)	1/2''	1/2''	1/2''	1/2''	1/2''	1/2''
Temperatura dimnih gasova (°C)	190	190	190	190	210	210
Količina vode u kotlu (l)	55	63	67	72	81	97
Težina kotla (kg)	241	247	266	284	300	337
Pad pritiska na vodenoj strani (mbar)	10	12	14	16	18	25
Preporučena površina za grijanje u m ² (neizilovan-izolovan objekat)	114-200	137-240	165-288	192-337	220-385	275-481
Preporučene dimenzije dimnjaka (mm)	Ø180x 8.000	Ø200x 8.000	Ø200x 8.000	Ø200x 10.000	Ø220x 10.000	Ø220x 10.000
Klasa kotla po EN 303-5	3	3	3	3	3	3